

world class | shrink wrap

Manual Chamber Shrink Wrapper MES 455 & 680

The Chamber Shrink Wrapper performs the sealing and shrinking in one operation using centre-folded shrink films with very low energy consumption. The operator inserts the product between the film and moves it along with the film to the sealing position and then brings down the hood to initiate the sealing. This is automatically followed by a shrinking process that is facilitated by the magnet keeping the hood down. Hot air is circulated inside the transparent chamber, in the hood down position, for excellent shrink results all around the package.




Key benefits



- Advanced microprocessor based electronic controls.



- Hygienic and operator friendly design.

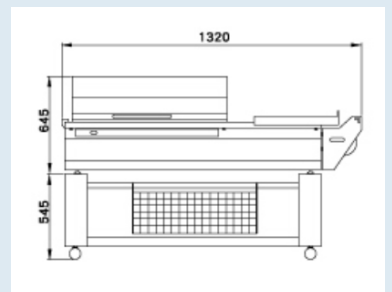

- Small footprint, energy efficient and versatile.

SHRINK



WRAP

technical data

	MES 455	MES 680
Speed	1 - 8 Packs Per Minute / 60 – 480 Per Hour Maximum*	
Sealing Dimension	500mm(l) x 400mm(w) x 250mm(h) (Product height dependant)	750mm(l) x 600mm(w) x 250mm(h) (Product height dependant)
Film Type	Polyolefin Centre folded 8-80um	
Maximum Film Reel Width	600mm	800mm
Safety	EN13849	
Machine Weight	151kg	250kg
Machine Dimensions	1320mm(l) x 820mm(w) x 1190mm(h)	1575mm(l) x 1020mm(w) x 1190mm(h)
Power Supply	230V 50Hz Single Phase	400V 50Hz 3 Phase + Neutral
Max Power Consumption	3000W	5300W

* Maximum for this range, output speed depends on pack size. Other range, speeds and pack size capabilities are available

